



XTREME-DUTY™

Airless High Pressure Hose



**The Right Hose for the Job.
Complete line of strong, safe and affordable hoses!**

- Complete line of hoses for all your high pressure spraying
- Colour-coded by pressure to take the guesswork out of using the right hose
- Easy-to-order, configurable part numbering system
- Durable design reduces downtime

PROVEN QUALITY. LEADING TECHNOLOGY.



Airless High Pressure Hose


Genuine Graco Parts

XTR-7 Airless Spray Gun

- 248609 Round handle, four-finger trigger, GHD tip guard, NO TIP
- 248610 Round handle, four-finger trigger, 519 flat tip
- 248611 Oval-insulated handle, four-finger trigger, 519 GHD RAC tip
- 248612 Oval-insulated handle, two-finger trigger, 519 GHD RAC tip
- 248613 Round handle, four-finger trigger, 519 GHD RAC tip
- 248614 Round handle, two-finger trigger, 519 GHD RAC tip

XTR-7 Airless Spray Gun Accessories

- 287450 2-finger trigger kit
- 287449 4-finger round trigger kit
- 287451 4-finger oval insulation trigger kit
- 246294 10 in (254 mm) gun extension, 500 bar (50 MPa, 7250 psi)
- 246295 15 in (380 mm) gun extension, 500 bar (50 MPa, 7250 psi)
- 246296 18 in (457 mm) gun extension, 500 bar (50 MPa, 7250 psi)
- 246297 180° spray nozzle, 7/8-14 UNC-2B, 500 bar (50 MPa, 7250 psi)
- 248837 Gun repair kit, includes gasket, needle and seat
- 245994 GHD tip guard kit
- 287032 Filter, 60 mesh
- 287033 Filter, 100 mesh
- 287034 Filter, 60 and 100 mesh combination

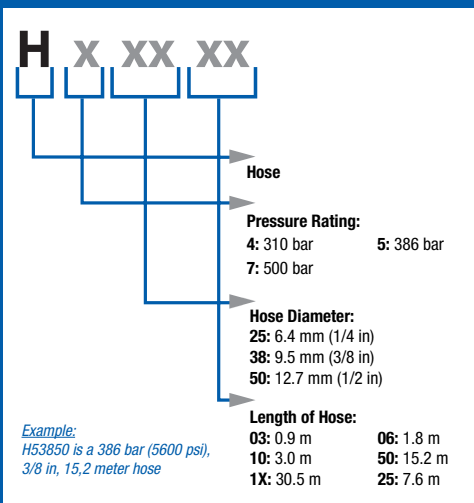

Technical Specifications

Working pressure 310 bar (4500 psi), 386 bar (5600 psi), 500 bar (7250 psi)
 Temperature rating (all sizes)..... - 40 to 180°C
 Chemical resistance Hose cover resistant to a wide variety of solvents, acids and bases
 Weather resistanceHose cover has outstanding resistance
 to oxygen, ozone, sunlight and general weather conditions
 Electrical propertiesConductive hose

Xtreme-Duty airless high pressure hose has passed the following quality and performance tests:

Impulse - Burst - Cold Bend - Flexibility - Change of Length - Visual Inspections

Xtreme-Duty 310 bar (4500 psi) High Pressure Hose

Part Number	Length	Diameter	End Connections - 1 & 2 (Female)
H42503	0.9m (3 ft)	6.4 mm (1/4")	1/4"(6.4mm)
H42506	1.8m (6 ft)	6.4 mm (1/4")	1/4"(6.4mm)
H42510	3.0m (10 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H42525	7.6m (25 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H42550	15.2m (50 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H4251X	30.4 m (100 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H43803	0.9m (3 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H43806	1.8m (6 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H43810	3.0m (10 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H43825	7.6m (25 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H43850	15.2m (50 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H4381X	30.4 m (100 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H45010	3.0m (10 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H45025	7.6m (25 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H45050	15.2m (50 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H4501X	30.4 m (100 ft)	12.7 mm (1/2")	12.7 mm (1/2")

Xtreme-Duty 386 bar (5600 psi) High Pressure Hose

Part Number	Length	Diameter	End Connections - 1 & 2 (Female)
H52503	0.9m (3 ft)	6.4 mm (1/4")	1/4"(6.4mm)
H52506	1.8m (6 ft)	6.4 mm (1/4")	1/4"(6.4mm)
H52510	3.0m (10 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H52525	7.6m (25 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H52550	15.2m (50 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H5251X	30.4 m (100 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H53803	0.9m (3 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H53806	1.8m (6 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H53810	3.0m (10 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H53825	7.6m (25 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H53850	15.2m (50 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H5381X	30.4 m (100 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H55010	3.0m (10 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H55025	7.6m (25 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H55050	15.2m (50 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H5501X	30.4 m (100 ft)	12.7 mm (1/2")	12.7 mm (1/2")

Xtreme-Duty 500 bar (7250 psi) High Pressure Hose

Part Number	Length	Diameter	End Connections - 1 & 2 (Female)
H72503	0.9m (3 ft)	6.4 mm (1/4")	1/4"(6.4mm)
H72506	1.8m (6 ft)	6.4 mm (1/4")	1/4"(6.4mm)
H72510	3.0m (10 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H72725	7.6m (25 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H72750	15.2m (50 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H7251X	30.4 m (100 ft)	6.4 mm (1/4")	6.4 mm (1/4")
H73803	0.9m (3 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H73806	1.8m (6 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H73810	3.0m (10 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H73825	7.6m (25 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H73850	15.2m (50 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H7381X	30.4 m (100 ft)	9.5 mm (3/8")	9.5 mm (3/8")
H75010	3.0m (10 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H75025	7.6m (25 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H75050	15.2m (50 ft)	12.7 mm (1/2")	12.7 mm (1/2")
H7501X	30.4 m (100 ft)	12.7 mm (1/2")	12.7 mm (1/2")

GRACO BVBA Industrieterrein Oude Bunders
 Slakweidestraat 31 • B-3630 Maasmechelen
 Tel: +32 (89) 770 700 • Fax: +32 (89) 770 777
 E-mail: info@graco.be • http://www.graco.com

©2012 Graco BVBA 337561NEU Rev.B 09/12. Printed in Europe.
 All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.